

Nill Building Solutions Products Pull/Shear Test Report

> Nill Building Solutions 04/18/23

Atlas Anchor LLC 9531 sw 6th Ct Pembroke Pines, FL 33025 (347) 537–9994 Info@AtlasAnchorTesting.Com

Company of the products being tested

Name: Nill Building Solutions Contact: Lance Nill, Christopher Gray

Address: 67 Mariner Drive Southampton, NY 11968 Phone number: (631) 494 - 6000 Email: <u>Lance@NillBuildingSolutions.Com</u>, <u>Christopher@NillBuildingSolutions.Com</u>

Statement of Qualification

Atlas Anchor L.L.C. is an expert in the following testing methods:

- Anchor pull & shear testing
 - o in accordance with ASTM E 488 (for pull only)
 - o NYC D.O.B 2016-005,
- Rock bolt anchors, grouted/soil temporary/permanent anchors, guy wire anchors, and helical anchors
 - o In accordance of ASTM D4435-13 for Rock anchors
 - In accordance with state DOT specific standards with grouted/soil temporary/permanent anchors (completed projects include NYS DOT)
- Roof anchor, balcony, guard rail and fall protection systems which are specific to each project and under the guidance of P.E.

Nicholas Barona was a regional sales manager with DeWalt from 2014 to 2016 & ITW Commercial Construction from 2016 to 2021. He has worked in NYC since 2015 and is an expert in concrete anchoring in 19th to 20th century construction and historical buildings. His expert experience involves the following concrete types: cinder-crete, ash-crete, hollow terra-cotta brick, high psi concrete with river rock aggregate from the 19th and 20th century, CMU block, brick, masonry and modern concrete of various PSI's. Atlas Anchor L.L.C. was formed in 2018 to service the NYC construction and engineering market in all aspects of post installed anchoring. Nicholas Barona has completed over 3,000 pull tests under various applications and conditions. Atlas Anchor L.L.C.'s equipment is serviced and calibrated per industry standards.

Certifications

- Hilti Adhesive Anchor Installer Certification Program
- DEWALT Adhesive Anchor training program



New York Licensed Professional Engineer

Name: Anatoli Chigrinuk Phone number: (631) 356 - 3420 Email: AlmaxLLC@Gmail.Com State of License: New York License Number: 082910 Qualification: Licensed Professional Engineer

Background

On Wednesday 01/28/22 Atlas Anchor LLC performed pull & shear testing at Nill Building Solutions on various Nill Building Solutions products. Follow up testing was done on the NB3C2 products on 3/31/23. Three concrete slabs that each had visible cracks throughout their slabs (cracked concrete) were used during testing: the first one was labeled sample ID "Drive wall" and had a compressive strength of 1742 (Used for testing NB3C2 products on 3/31/23). The second was named sample ID "Shop" had 1,140 PSI compressive strength. Concrete core samples were taken from both of these slabs and concrete compression tests were done by Metallurgical Engineering Services in Richardson, TX. The lab report is at the end of this report. The third was a slab poured 28 days prior to the testing on 01/28/22 had an unknown compressive strength. The following concrete products tested and installed with the corresponding anchors were (Refer to the manufacturers' catalog for the listed herein products design applications and description):

- NB3C1 ½" x 1 ¾" concrete thread- Patent pending
- NB5 standoff & Marksmen Thundermate anchor ½" X 3 ½" lg. Patent pending
- NB1C 5"X 5" flange fastened with Confast ¼" x 2 ¾" lg. concrete screw (CSFS14234) Patented
- NB1A2 5"X5 flange with threaded post fastened with Confast ¼" x 2 ¾" lg. concrete screw (CSFS14234) Patent pending
- NB3C ½" x 1 ¾" concrete thread Patent pending
- NB3C2 ¾" X 4" lg. flush mount anchor flange Patent pending

Pull Test Procedure

- 1. Fasten Nill attachment
- 2. Connect machine
- 3. Increase load every minute
- 4. Check anchor for movement
- 5. Hold for one minute.
- 6. Take photo of gauge and attachment

Products





67 Mariner Drive, Southampton, NY 11968 www. NillBuildingSolutions.com Office: 631.494.000 Cell: 631-283.2020 Christopher@NillBuildingSolutions.com

NB1C Patented



Nill Building Solutions products are protected by U.S. Patent No. 10,501,939 and/or other U.S. and Foreign patents pending

Figure 2

Atlas Anchor L.L.C. – 9531 SW 6th Ct Pembroke Pines, FL 33025 – (347) 537 - 9994 – Info@AtlasAnchorTesting.Com









Atlas Anchor L.L.C. – 9531 SW 6th Ct Pembroke Pines, FL 33025 – (347) 537 - 9994 – Info@AtlasAnchorTesting.Com

ThunderStud® WEDGE ANCHORS

TECHNICAL DATA

			ULTIMATE	LOAD	ALUES				
ANCHOR	EMBEDMENT	TORQUE	2000	PSI	4000	PSI	6000 PSI		
DIAMETER (IN)	DEPTH (IN)	FT/LB	TENSION (LBS.)	SHEAR (LBS.)	TENSION (LBS.)	SHEAR (LBS.)	TENSION (LBS.)	SHEAR (LBS.)	
	1-1/8		1170	1443	1771	1813	2773	2635	
1/4	1-3/4	5-10	1841	1443	2408	1813	2773	2635	
A CONTRACT OF	2-3/4		1975	1443	2748	1813	2830	2635	
	1-1/2		1631	4318	3636	5121	4448	6232	
3/8	3	25-30	3229	4318	5653	5121	5975	6232	
	5	and the second	4074	4318	6328	5121	6360	6232	
A CONTRACTOR	2-1/4		3999	7419	6714	9377	9616	9888	
1/2	4	50-60	6336	7419	8942	9377	10192	9888	
	6		6902	7419	10175	9377	12064	9888	
States and states	3-3/4		4999	8264	8747	12928	9760	16373	
5/8	5	75-90	8854	8264	15590	12928	16802	16373	
	7		9381	8264	16710	12928	17732	16373	
	3-1/4		6638	12504	11314	17050	16230	22965	
3/4	6	150-175	10084	12504	18408	17050	21092	22965	
	8		11170	12504	19805	17050	22522	22965	
U.S. Pressent and	3-7/8		8392	18250	16354	20234	16801	23980	
7/8	5-3/4	200-250	12064	18250	18250	20234	23404	23980	
L. C. S. C.	8-3/4	•	12784	18250	16850	20234	25575	23980	
	4-1/2		9773	23617	18250	27605	27460	28909	
1	7-1/2	250-300	11890	23617	26726	27605	34960	28909	
in the later	10		15590	23617	30491	27605	37840	28909	
	5-1/2		17550	32275	22971	42690	32368	55566	
1-1/4	7	400-450	21050	32275	- 27845	42690	48366	55566	
	10		27893	32275	34788	42690	61272	55566	

Values shown are average ultimate values and are offered only as a guide and are not guaranteed in any way. A safety factor of 4:1 or 25% is generally accepted as a safe working load. Reference should be made to applicable codes for the specific working ratio. * Tested by ATEC in accordance with ASTM E488-90 and ICBO ES AC01. Minimum embedment for satisfactory anchor performance is 4 1/2 bolt diameters. Deeper embedments will yield higher tension and shear capacity.

	ANCHU	OR MATERIAL C	OWPOSITIC	N	
MATERIAL	STEEL	STAINLESS STEEL	SPECIFICATION	STEEL	STAINLESS STEEL
STUD	AISI C12L14	303, 304, 316	ASTM	A 108, A 510	A 276, A 479
CLIP	AISI C1010-1018 1037	304, 316	FEDERAL	FF-S-325, GROUP II TYPE 4, CLASS 1	A 581, A 582 FF-S-325
WASHER	AISI C1010-1018	TYPE 18-8, 316	PLATING	ZINC QQ-Z-325C	GROUP II
NUT	LOW CARBON STEEL ASTM A 563, GRADE A	TYPE 18-8, 316	GALVANIZED	TYPE II, CLASS 3 ASTM A 153 CLASS C	TYPE 4, CLASS PASSIVATED

Length Identification System

Stamp O	n Anchor	A	В	С	D	E	F	G	Н	1	J	ĸ	L	М	N	0	P	Q	R	S	Т	U	V	W	X	Y	Z
	From	1%	2	2%	3	3½	4	4%	5	5%	6	6%	7	7½	8	8%	9	9½	10	11	12	13	14	15	16	17	18
Length Of Anchor (Inches)	But Not	2	2%	3	3½	4	4½	5	5%	6	6¼	7	7½	8	8%	9	9%	10	11	12	13	14	15	16	17	18	19

Figure 7 Thundermate submittal

Tension/Pull Testing

- 1.
- a. Product: NB3C ½" x 1 ¾" concrete thread Patent pending (Refer to figure 4)
- **b.** Result: At <u>4,225</u> pounds the attachment did not show any signs of movement or dislodging after being held for one minute.
- **c.** Installed at "Shop" ID concrete slab of 1,140 psi compressive strength (see report page 34 and 35)



- d. Product: NB3C ½" x 1 ¾" concrete thread Patent pending (Refer to figure 4)
- e. Result: At <u>4,125</u> pounds the attachment did not show any signs of movement or dislodging after being held for one minute.
- **f.** Installed at "Shop" ID concrete slab of 1,140 psi compressive strength (see report page 34 and 35)



- 3.
- g. Product: NB3C ½" x 1 ¾" concrete thread Patent pending (Refer to figure 4)
- **h.** Result: At <u>4,025</u> pounds the attachment did not show any signs of movement or dislodging after being held for one minute.
- i. Installed at "Shop" ID concrete slab of 1,140 psi compressive strength (see report page 34 and 35)



- 4.
- j. Product: NB3C1 ½" x 1 ¾" concrete thread Patent pending (Refer to figure 1)
- **k.** Result: At <u>4,000</u> pounds the attachment did not show any signs of movement or dislodging after being held for one minute.
- I. Installed at "Shop" ID concrete slab of 1,140 psi compressive strength (see report page 34 and 35)



- 5.
- m. Product: NB3C2 3/4" X 4" flush mount anchor flange Patent pending (Refer to figure 5)
- **n.** Result: At **<u>11,050</u>** pounds the attachment did not show any signs of movement or dislodging after being held for one minute.
- **o.** Installed at "Drive wall" ID concrete slab of 1,742 psi compressive strength (see report page 34 and 35)



i.

- p. Product: NB3C2 3/4" X 4" flush mount anchor flange Patent pending (Refer to figure 5)
- **q.** Result: At **<u>11,000</u>** pounds the attachment did not show any signs of movement or dislodging after being held for one minute.
- Installed at "Drive wall" ID concrete slab of 1,742 psi compressive strength (see report page 34 and 35)



Atlas Anchor L.L.C. – 9531 SW 6th Ct Pembroke Pines, FL 33025 – (347) 537 - 9994 – Info@AtlasAnchorTesting.Com

- 7.
- s. Product: NB3C2 3/4" X 4" flush mount anchor flange Patent pending (Refer to figure 5)
- t. Result: At <u>10,975</u> pounds the attachment did not show any signs of movement or dislodging after being held for one minute.
- **u.** Installed at "Drive wall" ID concrete slab of 1,742 psi compressive strength (see report page 34 and 35)



- 8.
- v. Product: NB1A2 5"x5" flange with threaded post fastened with Comfast 1/4"x2 3/4" lg.
 Patent pending (Refer to figure 3)
- w. Result: At <u>2,225</u> pounds the attachment did not show any signs of movement or dislodging after being held for one minute.
- x. Installed at concrete slab of unknown compressive strength



- y. Product: NB1A2 5"x5" flange with threaded post fastened with Comfast 1/4"x2 3/4" lg.
 Patent pending (Refer to figure 3)
- **z.** Result: At **2,275** pounds the attachment did not show any signs of movement or dislodging after being held for one minute.
- aa. Installed at concrete slab of unknown compressive strength



- bb. Product: NB1A2 5"x5" flange with threaded post fastened with Comfast 1/4"x2 3/4" lg.
 Patent pending (Refer to figure 3)
 - **cc.** Result: At **2,000** pounds the attachment did not show any signs of movement or dislodging after being held for one minute.
 - dd. Installed at concrete slab of unknown compressive strength



- ee. Product: NB1C 5"x5" flange fastened with Comfast 1/4"x2 3/4" lg. concrete screw (CSFS14234)– Patent pending (Refer to figure 2)
- **ff.** Result: At **5,150** pounds the attachment did not show any signs of movement or dislodging after being held for one minute.
- gg. Installed at concrete slab of unknown compressive strength



hh. Product: NB1C 5"x5" flange fastened with Comfast 1/4"x2 3/4" lg. concrete screw (CSFS14234)– Patent pending (Refer to figure 2)

- **ii.** Result: At **5,725** pounds the attachment did not show any signs of movement or dislodging after being held for one minute.
- jj. Installed at concrete slab of unknown compressive strength



Atlas Anchor L.L.C. – 9531 SW 6th Ct Pembroke Pines, FL 33025 – (347) 537 - 9994 – Info@AtlasAnchorTesting.Com

- kk. Product: NB5 standoff with Marksmen Thundermate anchor 1/2" x 3 1/2" lg.– Patent pending (Refer to figure 6)
- **II.** Result: At <u>**3,250**</u> pounds the attachment did not show any signs of movement or dislodging after being held for one minute.

mm. Installed at concrete slab of unknown compressive strength



- nn. Product: NB5 standoff with Marksmen Thundermate anchor 1/2" x 3 1/2" lg.– Patent pending (Refer to figure 6)
- **oo.** Result: At <u>**2,375**</u> pounds the attachment did not show any signs of movement or dislodging after being held for one minute.
- pp. Installed at concrete slab of unknown compressive strength



Shear testing

15.

- a. Product: NB3C ½" x 1 ¾" concrete thread Patent pending (refer to figure 4)
- b. Result: At **4,000** pounds the attachment did not show any signs of movement or dislodging after being held for one minute.
- c. Installed at "Shop" ID concrete slab of 1,140 psi compressive strength (see report page 34 and 35)



i.


Atlas Anchor L.L.C. – 9531 SW 6th Ct Pembroke Pines, FL 33025 – (347) 537 - 9994 – Info@AtlasAnchorTesting.Com

- a. Product: NB3C ½" x 1 ¾" concrete thread Patent pending (refer to figure 4)
- b. Result: At **4,050** pounds the attachment did not show any signs of movement or dislodging after being held for one minute.
- c. Installed at "Shop" ID concrete slab of 1,140 psi compressive strength (see report page 34 and 35)



Atlas Anchor L.L.C. – 9531 SW 6th Ct Pembroke Pines, FL 33025 – (347) 537 - 9994 – Info@AtlasAnchorTesting.Com

- 17.
- a. Product: NB3C1 ½" x 1 ¾" concrete thread Patent pending (refer to figure 1)
- b. Result: At **4,050** pounds the attachment did not show any signs of movement or dislodging after being held for one minute.
- c. Installed at "Shop" ID concrete slab of 1,140 psi compressive strength (see report page 34 and 35)

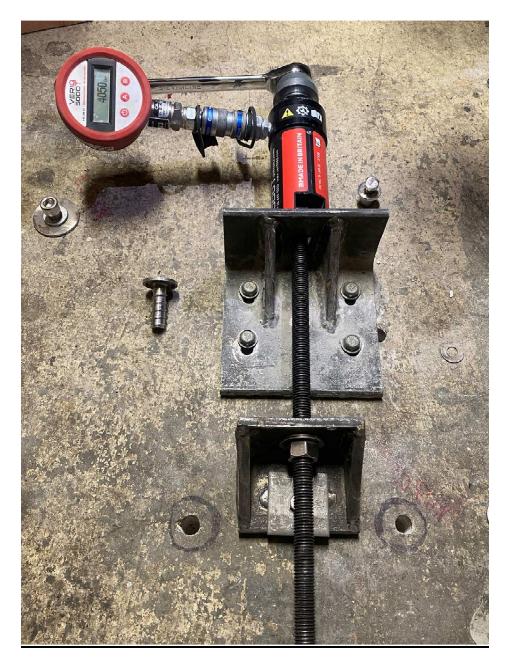


- 18.
- a. Product: NB3C1 ½" x 1 ¾" concrete thread Patent pending (refer to figure 1)
- b. Result: At **<u>4,000</u>** pounds the attachment did not show any signs of movement or dislodging after being held for one minute.
- c. Installed at "Shop" ID concrete slab of 1,140 psi compressive strength (see report page 34 and 35)



Atlas Anchor L.L.C. – 9531 SW 6th Ct Pembroke Pines, FL 33025 – (347) 537 - 9994 – Info@AtlasAnchorTesting.Com

- a. Product: NB3C1 ½" x 1 ¾" concrete thread Patent pending (refer to figure 1)
- b. Result: At **4,025** pounds the attachment did not show any signs of movement or dislodging after being held for one minute.
- c. Installed at "Shop" ID concrete slab of 1,140 psi compressive strength (see report page 34 and 35)

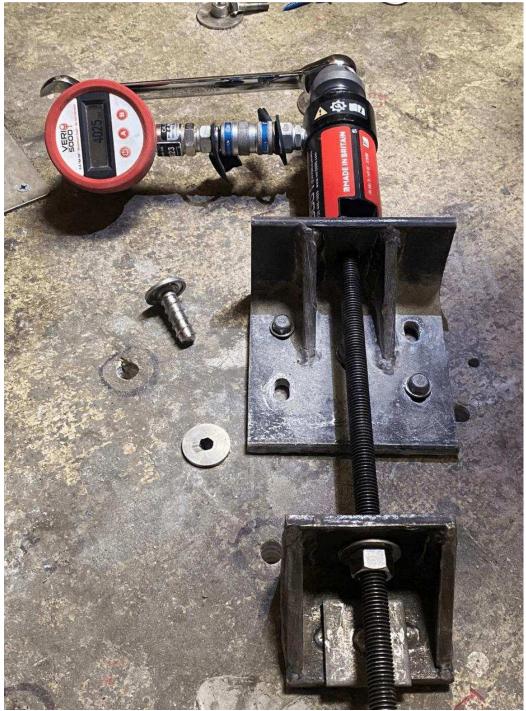

Atlas Anchor L.L.C. – 9531 SW 6th Ct Pembroke Pines, FL 33025 – (347) 537 - 9994 – Info@AtlasAnchorTesting.Com

- a. Product: NB3C2 ¾" X 4" lg. flush mount anchor flange -Patent pending (refer to figure 5)
- b. Result: At **7,950** pounds the attachment did not show any signs of movement or dislodging after being held for one minute.
- c. Installed at "Drive wall" ID concrete slab of 1,742 psi compressive strength (see report page 34 and 35)



- 21.
- a. Product: NB3C2 ¾" X 4" lg. flush mount anchor flange -Patent pending (refer to figure 5)
- b. Result: At **7,650** pounds the attachment did not show any signs of movement or dislodging after being held for one minute.
- c. Installed at "Drive wall" ID concrete slab of 1,742 psi compressive strength (see report page 34 and 35)



Atlas Anchor L.L.C. – 9531 SW 6th Ct Pembroke Pines, FL 33025 – (347) 537 - 9994 – Info@AtlasAnchorTesting.Com

- a. Product: NB3C2 ¾" X 4" lg. flush mount anchor flange -Patent pending (refer to figure 5)
- b. Result: At **7,775** pounds the attachment did not show any signs of movement or dislodging after being held for one minute.
- c. Installed at "Drive wall" ID concrete slab of 1,742 psi compressive strength (see report page 34 and 35)



Atlas Anchor L.L.C. – 9531 SW 6th Ct Pembroke Pines, FL 33025 – (347) 537 - 9994 – Info@AtlasAnchorTesting.Com

		And the second second second second				
		Tel: 720-4 www.veri5	000.com			
Certi	ficat	e of	^c Ca	libr	atio	n
GAUGE REF. No.	MAN-482	3				
GAUGE RANGE	0-30 kN					
MODEL No.	Digital B	luetooth	Gauge			
We certify that this ga our limits of plus or mi to BS EN 837-1,	uge has been ins nus 2% F.S.D. Ca	pected and cali alibration under	brated for accu taken using a n	racy and passe naster test gaug	d within ge manufactur	ed
Results obtained are	as follows:-					
MASTER KN	5.0	10.0	15.0	20.0	25.0	30.0
ACTUAL KN	4.9	9.9	15.1	20.1	25.1	30.1
TRACEABILITY Gauges manufact	ured to BS EN	837-1				
Calibration undertake number 12127 tracea Note: In all accordanc	bility to UKAS vi	ia certificate n	o.57471. Date	d 31.12.19. (v	alid for 12 mo	
Accuracy of gauges a Gauge will be permar	s stated above of the stat	cannot be gua should maxim	ranteed shoul um load be ex	d the unit be s ceeded.	ubjected to m	nisuse.
		June	18, 2022			
THIS CERTIFICATE N Atlas	WILL EXPIRE O Anchor Sy		IO, LOLL			
Customer 2794 Order No.			Date of Calibra	June	18, 202	1
	Am	1/1	SID			
Approved Signatory 6/18/2021		1	14			

Figure 1 Calibration report for testing on 01/28/22

	HYDRAJAWS* CI	ERTIFIED	D			ALLFAST	ENERS	-					
							COM A						
	Certific	ate	of	Cal	libra	ation	Mar La						
-	GAUGE REF.		MAN519			1							
	GAUGE RANK	~~	0 - 1120					in the					
	MODEL No.		2050										
	We certify that this gas minus 2% F.S.D. Calib	uge has be	en inspecte	id and calibr	wied for accur	The second second second							
-	minus 2% F.S.D. Calib Results obtained are			ng a calibrat	ed test gauge	manufactured to BS	EN 837-1.						
	contract occurring are	as tollows											
	MASTER 23	250	4500	6750	9000	11125	Ng						
	ACTUAL 22	275	4525	6800	9075	11200		- VII					
	TRACEABILITY Gauges manufactu	red to B	S EN 817				13						
	Calibration undertaken	using a E	Rudenberg	oil operates	d dead-weigt	ht tester type 280H	Serial number HYD31						
	MAS-0010 traceability to UKAS via centificate no. 69850. Expires 24th of April 2023. Note: In all accordance with BS EN 837-1 this certificate is valid for a period of 12 months from issue.												
	Accuracy of gauges a Gauge will be perman						subjected to misuse.						
	Note: This certificate number above.						gauge reference						
	THIS CERTIFICATE W	ILL EXPI	REON	DEC. 5. 3	2023								
1 1	Customer	ATLAS	ANCHO	R		Order No.	\$000095636						
	Date of Calibration	DEC. 5	, 2022	1									
	Approved signatory		Shi	mb		Date	DEC. 5. 2022						
			in the second	V			80 Meadow Lane, Carista products/power-tools/bran	NJ 07072					

Figure 2 Calibration report from testing done on 3/31/23 (NB3C2)



April 12, 2023

- REPORT OF: Material Analysis
- REPORT TO: Atlas Anchor Testing Attn: Nicholas Barona 9531 SW 6th Ct. Pembroke Pines FL 33025

DATE APPROVED: March 3, 2023

IDENTIFICATION: 1 ea. Drive wall NB3C2

1 ea. Shop



Figure 1: Sample, as received

PROCEDURES

Concrete compression testing was performed per ASTM C39 using a Satec Systems Model: Apex 22EMF, S/N: 1017, with a calibration due date of date of 4/20/2023. Testing was performed on 4/12/2023.

RESULTS: Next Page

Lab No. 45431 Page 1 of 2

NOTE: Submitted material will be retained for 30 days unless otherwise notified in writing. Any interpretations and/or opinions made in our reports are not subject to the accreditation. Our letters and reports are for the exclusive use of the client to whom they are addressed. The use of our name must receive our prior written approval. Our letters and reports apply to the sample tested and/or inspected and are not necessarily indicative of the qualities of apparently identical or similar materials.

(972) 480-0033 • FAX (972) 480-0036 • 845 E. Arapaho Road • Richardson, Texas 75081 • www.metengr.com

Figure 3 PSI report from Metallurgical Engineering

Material Analysis Atlas Anchor Testing April 12, 2023

CONCRETE COMPRESSION TESTING

Sample ID	Area, (in²)	Peak Load, (lbs)	Compressive Strength, (PSI)
Drive wall NB3C2	1.4849	2,586	1,742
Shop	1.4019	1,599	1,140

These results are based on the tests performed and are subject to change upon the receipt of new or additional information.

Respectfully submitted,

METALLURGICAL ENGINEERING SERVICES, INC. Firm Registration No. F-2674

uil Atob

Daniel A. Stolk, PE, CWI Principal Engineer

Lab No. 45431 Page 2 of 2

Figure 4 PSI report from Metallurgical Engineering